


CASE BY CASE BASIS. SUBJECT TO PRIOR APPROVAL BY THE SALT LAKE COUNTY SURVEYOR.

## GENERAL NOTES

- Materials, construction and workmanship shall be in accordance with APWA Manual of Standard Specifications (2002 Edition), and supplements thereto which are in effect at the date of this request.
- County Monument cover, frame and pre cast brass and marker base shall be furnished by the County as provided in the permitting process process.
- 3. Cover, frame, riser and pre cast brass and marker base can be obtained with prior appointment made with the Salt Lake County Salt to the County Salt County Mades Unto Add 47. The developer, contractor, or agent shall be responsible for the transportation of all monuments and incidental items required to complete the monument installation.
- be installed.

- Reinforcing steel used in County survey monuments shall be No. 4 bars.
- The County Surveyor shall cross brass marker after installation of survey monument.
   Monument shall be installed so the cross can be made as close to the center of the 4" brass as possible. The cross may not fall within the brass text.
- Contractor shall allow the County Surveyor an opportunity to salvage all existing monuments, specifically, rings, risers, lids, and brass markers.
- 8. Field inspection by governing entity required prior to installation of monument.
- The non-use of any materials received from Salt Lake County shall not constitute a claim of credit.
- 10.Developer/Agent shall provide copies of approved and recorded subdivision plats, street dedications, or affidavit of corrections showing coordinates of new monuments and their relationship to monument control.

## MONUMENT FLOW PROCESS

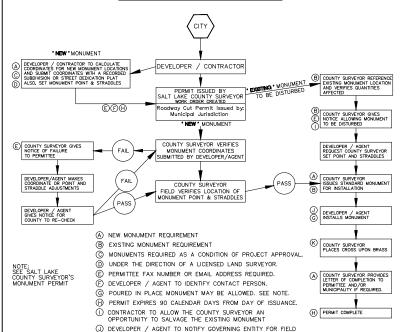

INSPECTION AND APPROVAL PRIOR TO INSTALLATION OF MONUMENT



Prepared By: ( Surveyed By:

Propored By The Office Of:
Bradley E. Park P.L.S.
Salt Lake County Surveyor
2001 S. State St. #11-400
Pt. Box 5575
Salt Lake City, Utah 54114-4575
(389) 468-8240

MONUMENT

STREET

COUNTY

PROCESS

FLOW

MONUMENT

AND